
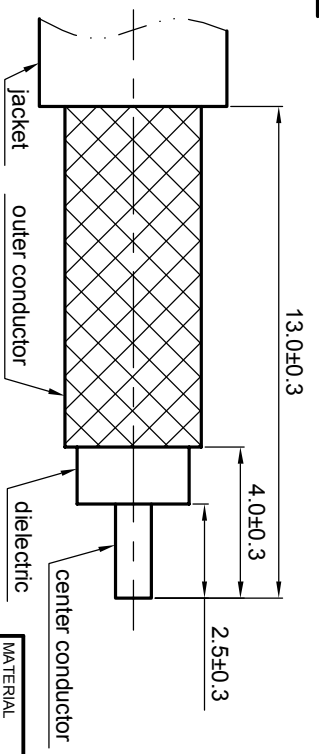


**NOTES: (UNLESS OTHERWISE SPECIFIED)**

1. Interface comply with IEC 169-15.
  2. Part must be packaged to avoid any damaged during transportation.
- ⚠ After crimping dimension should be AF/SW 5.41.

REV.	DESCRIPTION	APPROVED	DATE	ECN

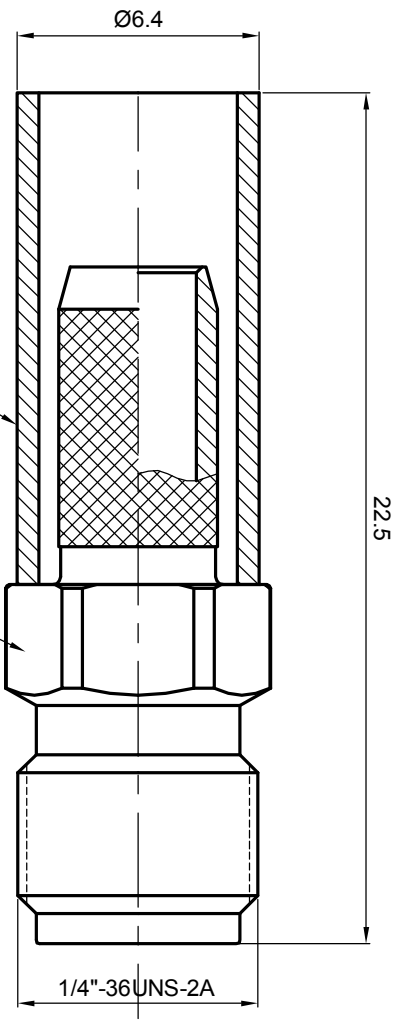

MATERIAL		SEE BOM OF DETAILS		TOLERANCES		THIRD ANGLE PROJECTION	
SEE BOM OF DETAILS		SEE BOM OF DETAILS		Oplice X ±1 1place X ±0.1 2place .XX ±0.05 Angle ±5°		GENERAL ECCENTRICITY <input checked="" type="checkbox"/> 0.06	
FINISH		SEE BOM OF DETAILS		Remove burrs and sharp edges		DRAWN BY	
Plating part to be touched by gloves		SEE BOM OF DETAILS				NAME	
SURFACE		VOLUME		NOTICE: Those drawings and specifications are the property of ZEETEQ CORPORATION and used only for the specify purpose authorised by ZEETEQ.		DATE	
						DRAWN BY Billy.Lei	
						DATE 11 Oct 07	
						CHECKED BY	
						APPROVED BY	

TITLE				SCALE	
SMA, Jack, cable				5:1	
DWG NO.				DO NOT SCALE DRAWING	
5161.SMA.JSC.08.111				SIZE	
REV.				SHEET	
S1				1 of 1	

