
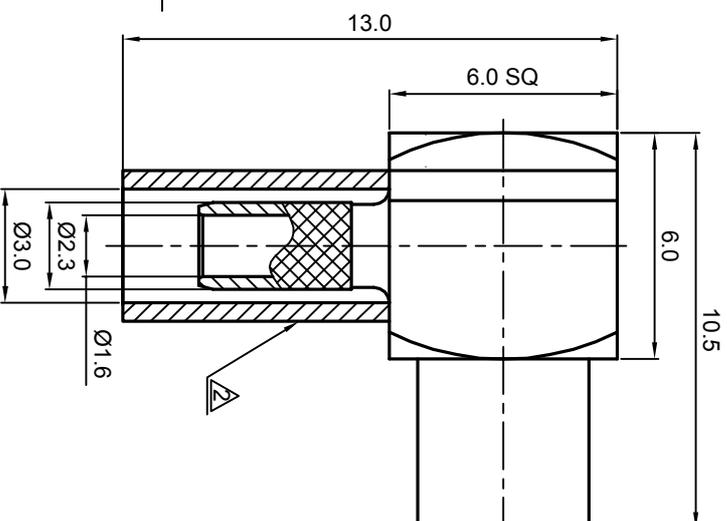


**NOTES: (UNLESS OTHERWISE SPECIFIED)**

1. The interface comply with IEC:169-36.
2. After crimping dimension should be SW3.25

REV.	DESCRIPTION	APPROVED	DATE	EON

**RECOMMENDED CABLE STRIPPING DIMENSIONS**

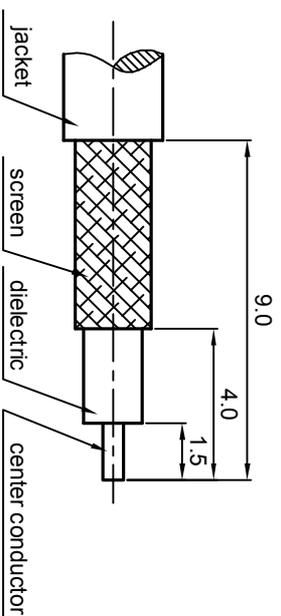

1.6

MATERIAL <b>SEE BOM FOR DETAILS</b>		TOLERANCES 0place X ±1 1place X ±0.1 2place XX ±0.05 Angle ±5°		THIRD ANGLE PROJECTION 		TITLE <b>Zeeteq</b>	
FINISH <b>SEE BOM FOR DETAILS</b>		Remove burrs and sharp edges 		GENERAL ECCENTRICITY <input checked="" type="checkbox"/> 0.06		DWG. NO. <b>5105.MCX.JRC.06.111</b>	
Plating part to be touched by gloves		DRAWN BY Danny		NAME DATE		REV. S1	
Dimension apply before plating		CHECKED BY		APPROVED BY		SCALE 5:1	
XXX - measuring point for plating		SURFACE		VOLUME		DO NOT SCALE DRAWING	
						SIZE A4	
						SHEET 1 of 1	

**MCX, JACK, ANGEL**

**5105.MCX.JRC.06.111**

SCALE 5:1 DO NOT SCALE DRAWING SIZE A4 SHEET 1 of 1