



NOTES: (UNLESS OTHERWISE SPECIFIED)

- Interface according to MIL-STD-348A.
- After crimping dimension should be AF/SW 3.25

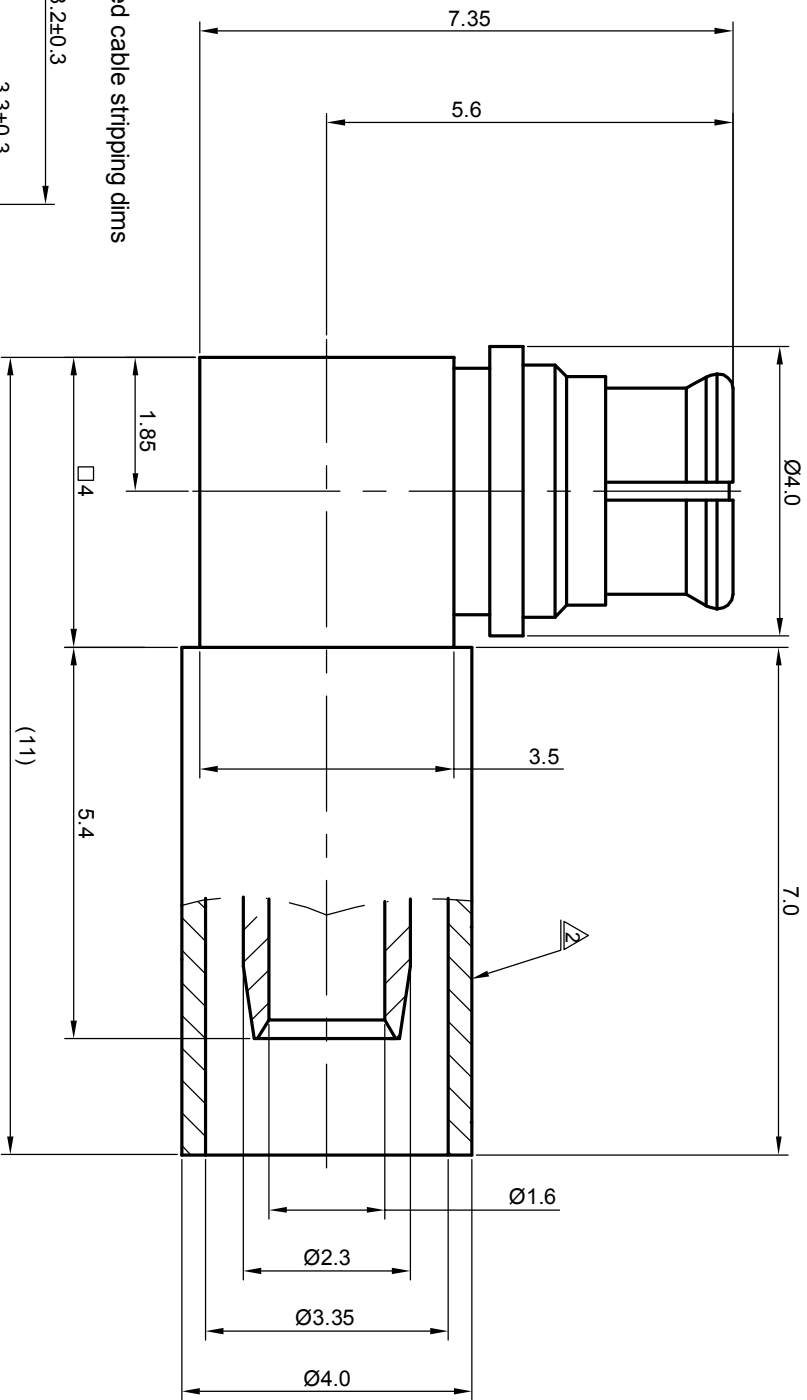

recommended cable stripping dims

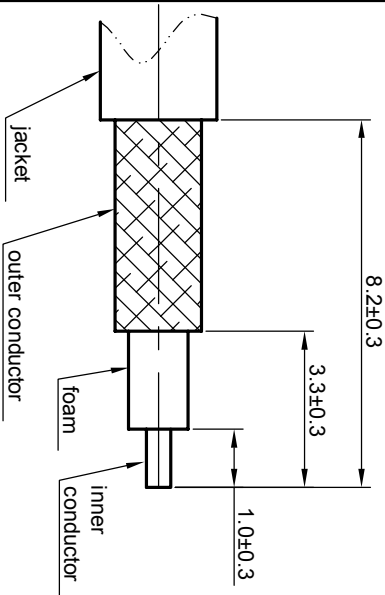

REV.	DESCRIPTION	APPROVED	DATE	ECN

MATERIAL SEE BOM		TOLERANCES		THIRD ANGLE PROJECTION		TITLE	
FINISH SEE BOM		Remove burrs and sharp edges		GENERAL ECCENTRICITY $\sqrt{0.06}$		Zee-teq	
Plating part to be touched by gloves		Opface X ±1 1place X ±0.1 2place XX ±0.05 Angle ±5°		NAME Collin		SMP, JACK, CABLE	
Dimension apply before plating		-0.1 +0.1		DATE 12Nov07		DWG. NO. 5110.SMP.JRC.07.111	
XXX - measuring point for plating		NOTICE: Those drawings and specifications are the property of ZEETEQ CORPORATION and used only for the specify purpose authorised by ZEETEQ		CHECKED BY		SCALE 10:1	
SURFACE		APPROVED BY		DRAWN BY		DO NOT SCALE DRAWING	
VOLUME						SIZE A4	
						SHEET 1 of 1	

