

DATA SHEET

Cable connector



Part Number

5064.N.JSC.12.133

Description


N, Jack, Bulkhead, Cable Mount

Interface Standard

IEC 60169-16

Suitable Cable

UT214/U RG225/U RG393/U

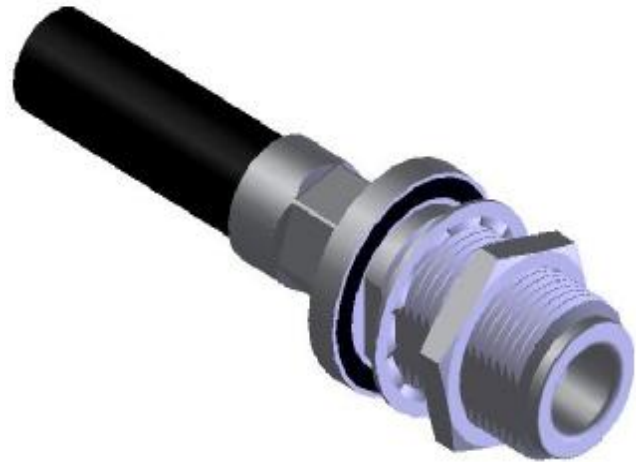

Electrical Data

Impedance	50	Ω		
Max. operating frequency	5	GHz	cable limited	
Frequency range	DC to 1GHz	1 to 2.2GHz	2.2 to 3GHz	3 to 5GHz
VSWR	≤1.04	≤1.05	≤1.06	≤1.12
Insertion loss	0.03√f(GHz)	dB		
Insulation resistance	≥5000	MΩ		
Center contact resistance	≤1	mΩ		
Outer contact resistance	≤0.25	mΩ		
Dielectric withstanding voltage	≥2500	Vrms @ 50Hz	connector limited	
Working voltage	≤1000	Vrms @ 50Hz	connector limited	

Mechanical Data

Mating cycles	≥500	
Center contact axial force	≥28	N
Center contact axial torque	≥0.03	Nm
contact gauge ret. Force	≥0.56	N
Center contact	solder	
Outer contact	crimp	
Cable retention force		
-UT225/U	≥553	N
-RG214/U RG393/U	≥477	N

Environmental Data

Operating temperature	restricted by cable and/or silicone used
2002/95/EC (ROHS)	compliant
Sealing	IP68 (IEC60529)
Thermal shock	MIL-STD-202 Method107, condition B
Moisture resistance	MIL-STD-202 Method106
Corrosion resistance	MIL-STD-202 Method101, condition B
Vibration	MIL-STD-202 Method204, condition D
Shock	MIL-STD-202 Method213, condition I

Material Data

Piece Parts	Material	Surface Plating
center contact	Phosphor bronze	Au
outer contact	Brass	CuSnZn
insulator	PTFE	
Ferrule	Brass	CuSnZn
Nut	Brass	CuSnZn
Lock washer	Stainless steel	Passivated
O-ring	silicone rubber	

Zeeteq the technology connecting people

No. 51 Sci.-Tech Industry Park, Huoju
Road, SND, Suzhou, China
Zip: 215009

Tel: +86 512 6807 8808
Fax: +86 512 6807 8818
www.zeeteq.com

Rev.: a
issued: 2008-4-29
page: 1 of 1