



NOTES: (UNLESS OTHERWISE SPECIFIED)

- 1. The interface comply with IEC169-16
- 2. Part must be packaged to avoid any damaged during transportation

(39.3)

S Q 12.0

RECOMMENDED CABLE STRIPPING DIMENSIONS

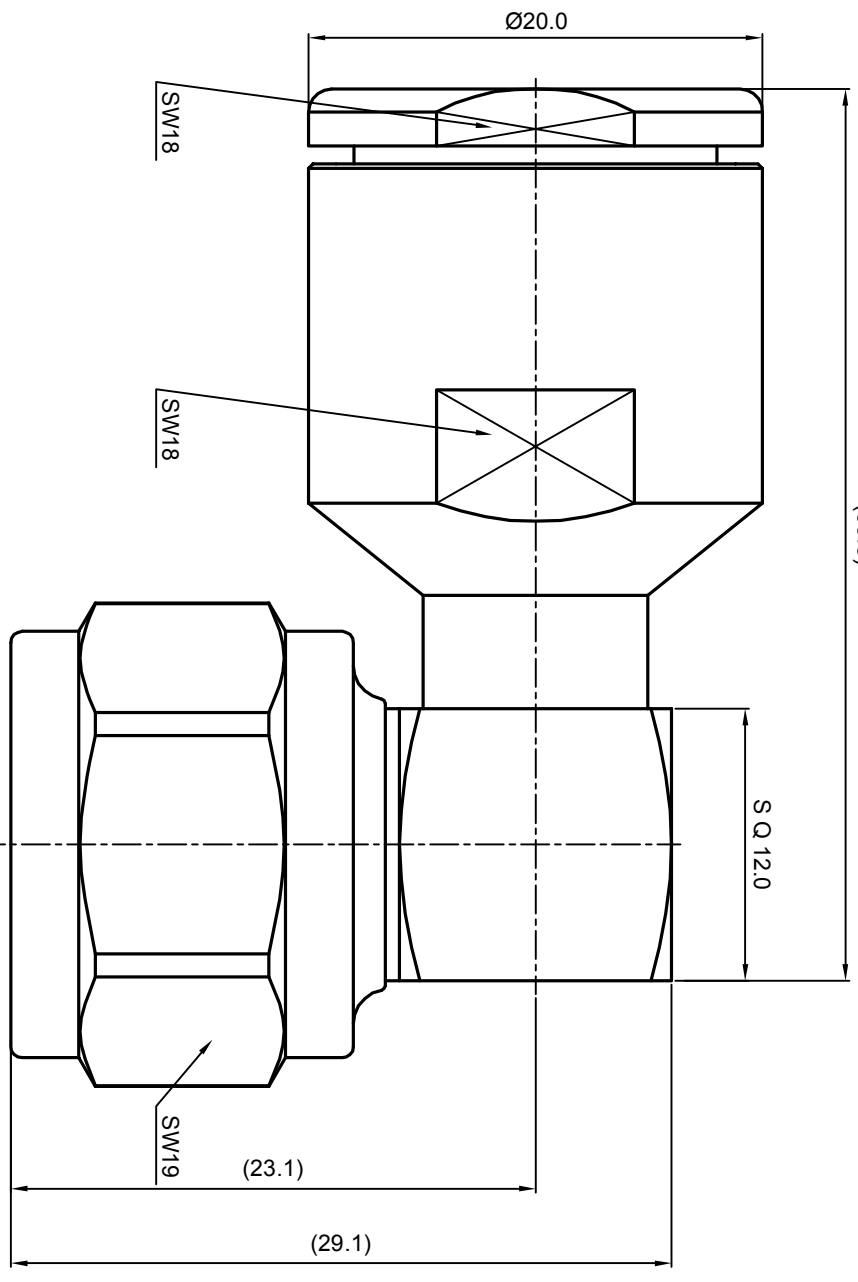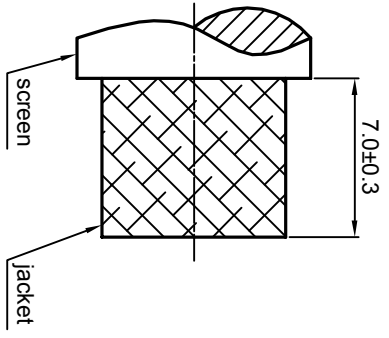

REV.	DESCRIPTION	APPROVED	DATE	EON

MATERIAL		SEE BOM FOR DETAILS		TOLERANCES		THIRD ANGLE PROJECTION		TITLE	
FINISH		SEE BOM FOR DETAILS		Remove burrs and sharp edges		GENERAL ECCENTRICITY		N, PLUG, CABLE MOUNT	
Plating part to be touched by gloves		X ±1		-0.2		Ø 0.06		Zeeteq	
Dimension apply before plating		X ±0.1		+0.2		DRAWN BY		DWG. NO.	
XXX - measuring point for plating		XX ±0.05		Angle		DANNY. D		5191.N.PRC.12.133	
SURFACE		VOLUME		APPROVED BY		DATE		REV.	
						04/Mar/08		S1	
<p>NOTICE: Those drawings and specifications are the property of ZEETEQ CORPORATION and used only for the specify purpose authorised by ZEETEQ</p>									
SCALE		DO NOT SCALE DRAWING		SIZE		SHEET			
3:1				A4		1 of 1			

