

DATA SHEET

Cable connector



Part Number

5054.N.PRC.12.133

Description


N, Plug, Right angle, Cable Mount

Interface Standard

IEC 60169-16

Suitable Cable

RG214/U RG225/U RG393/U

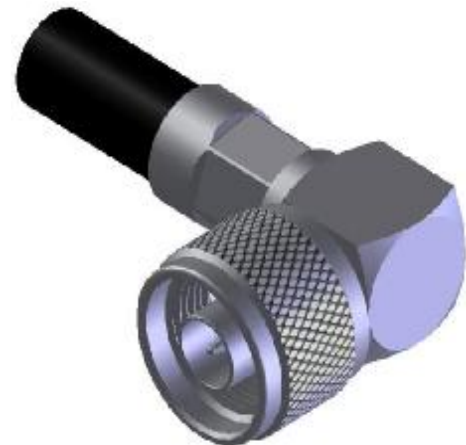

Electrical Data

Impedance	50	Ω	
Max. operating frequency	3	GHz	cable limited
Frequency range	DC to 1GHz	1 to 2.2GHz	2.2 to 3GHz
VSWR	≤ 1.03	≤ 1.04	≤ 1.10
Insertion loss	$0.07\sqrt{f(\text{GHz})}$	dB	
Insulation resistance	≥ 5000	M Ω	
Center contact resistance	≤ 1	m Ω	
Outer contact resistance	≤ 0.25	m Ω	
Dielectric withstanding voltage	≥ 2500	Vrms @ 50Hz	connector limited
Working voltage	≤ 1000	Vrms @ 50Hz	connector limited

Mechanical Data

Mating cycles	≥ 500	
Center contact axial force	≥ 28	N
Center contact axial torque	≥ 0.03	Nm
contact gauge ret. Force	≥ 0.56	N
Center contact	solder	
Outer contact	crimp	
Cable retention force		
-RG225/U	≥ 553	N
-RG214/U RG393/U	≥ 477	N

Environmental Data

Operating temperature	restricted by cable and/or silicone used
2002/95/EC (ROHS)	compliant
Sealing	IP68 (IEC60529)
Thermal shock	MIL-STD-202 Method107, condition B
Moisture resistance	MIL-STD-202 Method106
Corrosion resistance	MIL-STD-202 Method101, condition B
Vibration	MIL-STD-202 Method204, condition D
Shock	MIL-STD-202 Method213, condition I

Material Data

<u>Piece Parts</u>	<u>Material</u>	<u>Surface Plating</u>
center contact	Phosphor bronze	Au
outer contact	Brass	CuSnZn
insulator	PTFE	
ferrule	Brass	CuSnZn
nut	Brass	CuSnZn
gasket	silicone rubber	

Zeeteq the technology connecting people
 No. 51 Sci.-Tech Industry Park, Huoju
 Road, SND, Suzhou, China
 Zip: 215009

Tel: +86 512 6807 8808
 Fax: +86 512 6807 8818
www.zeeteq.com

Rev.: a
 issued: 2008-4-29
 page: 1 of 1